



- 1 Surveillance camera  
(© Pixinoo - Fotolia.com)
- 2 Weather station  
(© emeraldphoto - Fotolia.com)
- 3 Smoke detector system  
(© magraphics.eu - Fotolia.com)

## Fraunhofer Institute for Ceramic Technologies and Systems IKTS

## Fraunhofer Institute for Manufacturing Technology and Advanced Materials IFAM Branch Lab Dresden

Winterbergstrasse 28  
01277 Dresden I Germany

### Contact

Dr.-Ing. Steffen Ziesche  
Phone: +49 351 2553 7875  
E-Mail: Steffen.Ziesche  
@ikts.fraunhofer.de

Dr. rer. nat. Lars Röntzsch  
Phone +49 351 2537 411  
E-Mail: Lars.Roentzsch  
@ifam-dd.fraunhofer.de

www.ikts.fraunhofer.de  
www.ifam.fraunhofer.de/h2

## LONG LIFE MICRO POWER UNIT

### Motivation

Off-grid power systems are widely spread throughout automation, environment and security technology, where a few watts of electrical power are needed

- over a longer period of time,
- with interrupted operation and/or
- at harsh and varying environmental conditions.

Nowadays, such systems are usually equipped with batteries. Hydrogen fuel cell-based power supply offers several advantages:


- Small size
- High energy densities (cf. Table 1)
- Many recharge cycles
- Low maintenance effort
- No self-discharge
- No energy losses due to temperature variations

Fuel cell systems with a solid-state hydrogen storage integrated in a monolithic ceramic tank allow for a highly compact design. Thus, durable power units with a high efficiency can be achieved.


Micro Power Unit	CR2450 (rechargeable lithium button cell)
FC system with integrated solid-state hydrogen store:	Electrochemical storage
• $22.5 \times 22.5 \times 5 \text{ mm}^3 = 2.5 \text{ cm}^3$	• $\emptyset 24 \times 5 \text{ mm}^3 = 2.3 \text{ cm}^3$
• 16 compartments with storage material	
⇒ $m_{\text{storage material}} = 16 \times 0.15 \text{ g} = 2.4 \text{ g}$	• 120 mAh at 3.6 V
⇒ $m_{\text{hydrogen}} = 2.4 \text{ g} \times 1.5 \text{ wt. \%H}_2 = 0.036 \text{ g}$	⇒ $E_{\text{el}} = Q \times U$
⇒ $E_{\text{hydrogen}} = 0.036 \text{ g} \times 33 \text{ Wh/g} = 1.2 \text{ Wh}$	
• FC efficiency: 60%	• Electrical energy: 430 mWh
• Electrical energy: 720 mWh	• 190 Wh/l
• 290 Wh/l	• Cyclability < 100
• Cyclability > 1000	

Table 1 Comparison of energy densities

4

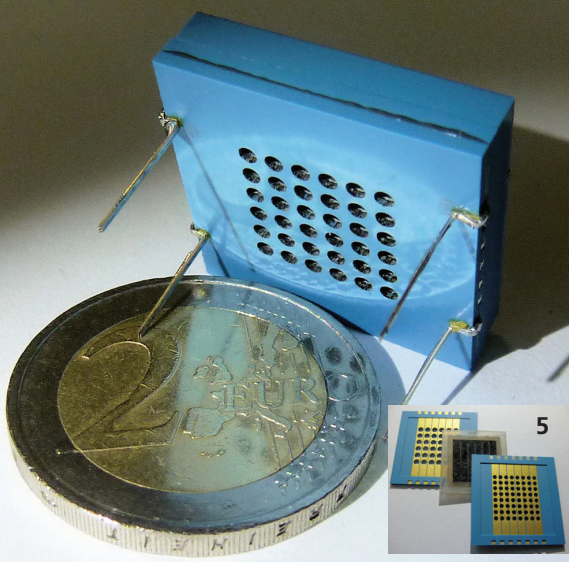

6

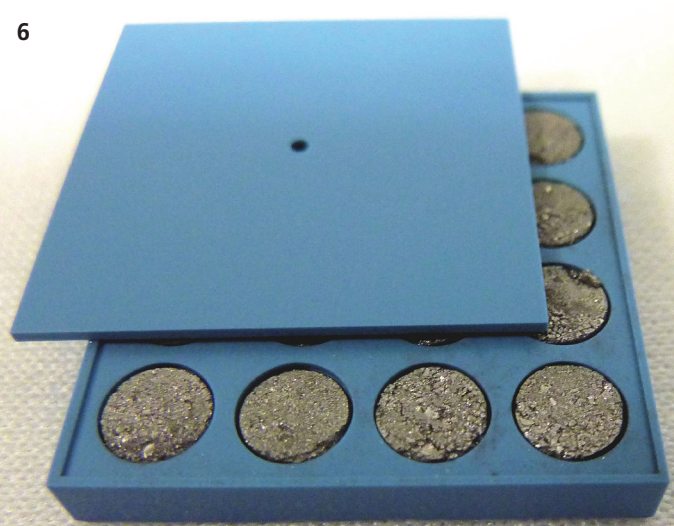

## Applications

- Sensor devices (e.g. weather stations)
- Long-term security surveillance
- Portable electronics
- Medical devices

- Moderate pressure requirements (~30 bar H<sub>2</sub>)
- Exhaust heat of the fuel cell is used for the endothermic dehydrogenation reaction, thus, the overall efficiency is increased
- High integration level allows robust and durable use like batteries

- 4 Fuel cell based Micro Power Unit
- 5 Multilayer ceramic fuel cell
- 6 Ceramic hydrogen tank compartment

## Detailed Information

The Micro Power Unit is based on a micro-PEM fuel cell which is manufactured by ceramic multilayer technology (LTCC; cf. Fig. 1) allowing to integrate the hydrogen solid-state store. Thus, an intimate contact between the energy converter and the storage unit is achieved.

Compacted metal hydrides are used as a solid-state hydrogen storage material. Therefore, several benefits are realized:

- High energy densities due to a high volumetric storage capacity of hydrides (cf. Table 1)
- Fast loading and (if necessary) unloading of hydrogen at temperatures between -10°C and 40°C (cf. Fig. 2)

## Fraunhofer R&D Services

- Customized development of power units with regard to
  - Power input and output
  - Energy capacity
  - Environmental requirements
  - Charging equipment
- Development of materials processing and implementation technologies
- Design, construction, test and evaluation of micro power units
- Cycling tests for life-time evaluation
- Safety and reliability tests
- End-of-life processing

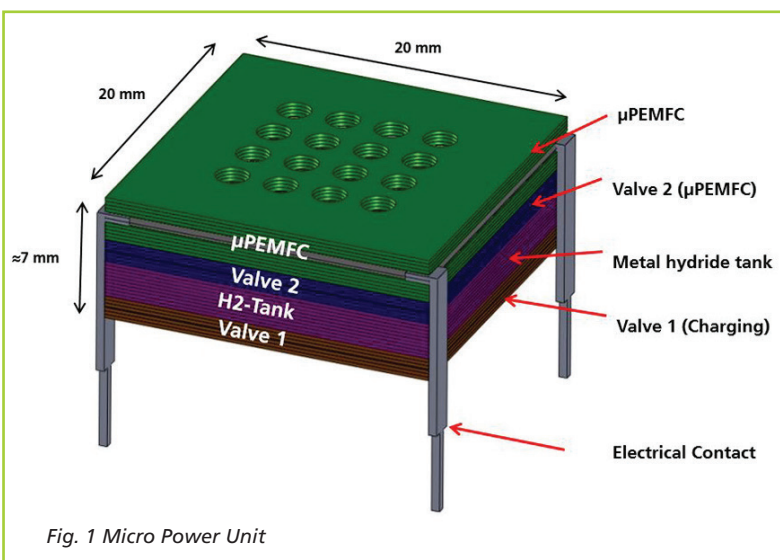


Fig. 1 Micro Power Unit

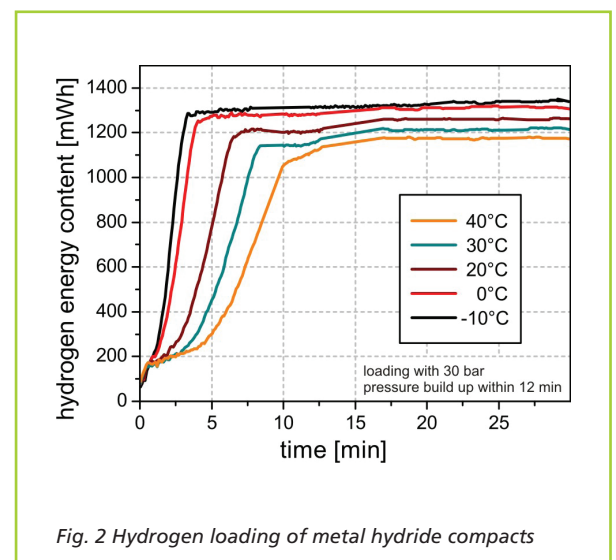


Fig. 2 Hydrogen loading of metal hydride compacts